


An optional built-in GSM module can be installed inside the smart-MAC smart meters, to ensure communication via mobile Internet (GPRS) for cellular networks 850/900/1800/1900MHz.


To insert a SIM card into the GSM module inside the device, follow these steps.

1. Remove the top cover of the device.
2. Insert the micro-SIM card into the slot with the correct side, as in the photo.

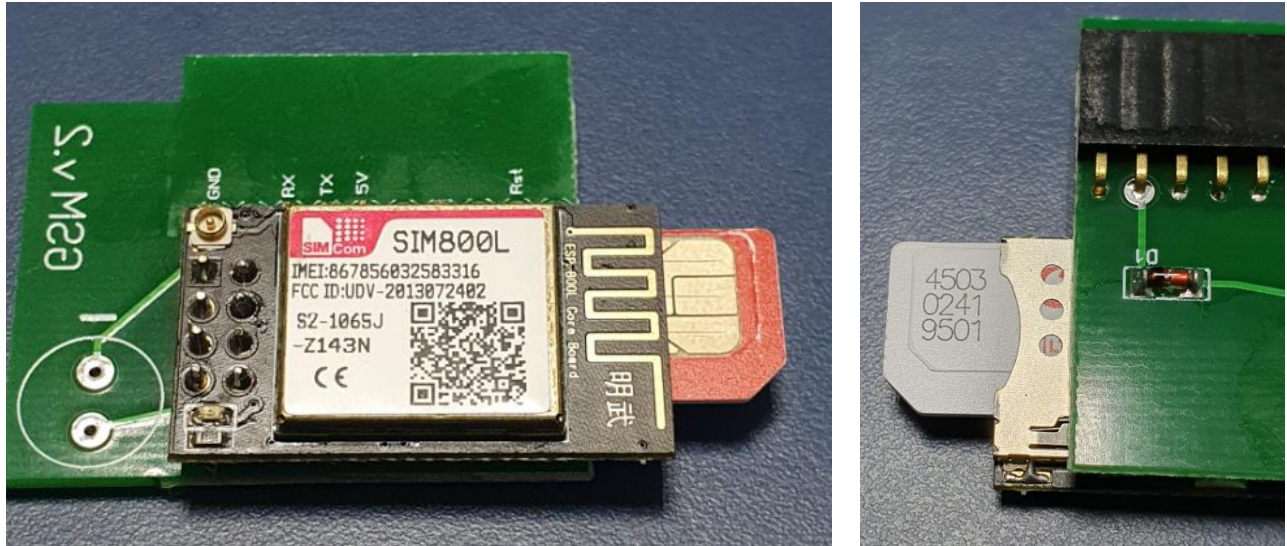

In the device settings in the menu "Network Config", check the GSM module settings.

Check the box "Use GSM" and specify the APN (Access Point Name) of your mobile operator, if necessary.

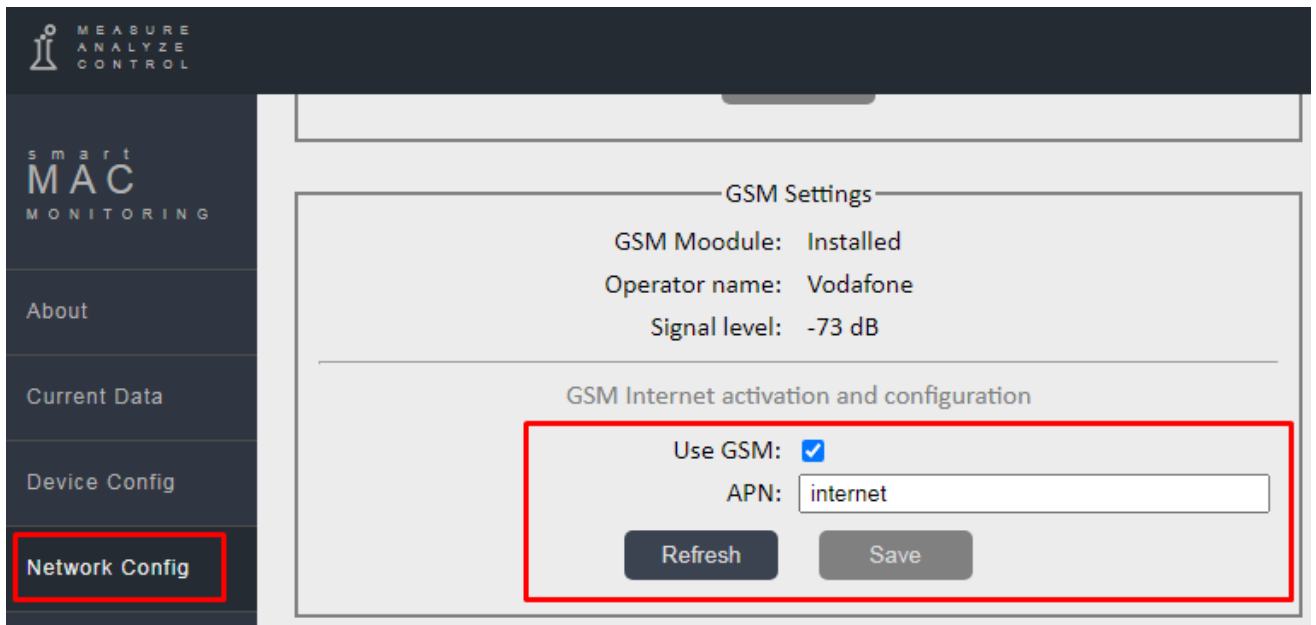

Note the restrictions when using the GSM connection:

- MQTT protocol and APIs are not available